


SELBSTSICHERNDE STECKVERBINDER - CONEX

Winkel-Schwenkverschraubung mit
zylindrischem Außengewinde - RPB
MG

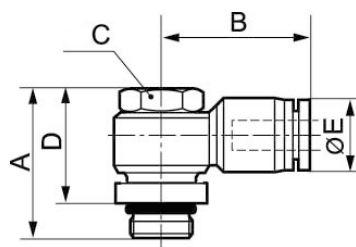

Pression min. d'utilisation - EU

0 / 10 bar

Min/Max Temperatur

0 / 60 °C

Art. Nr	AG	Abm. A (mm)	Abm. B (mm)	Abm. C (mm)	Abm. D (mm)	Abm. E (mm)
RPB MG04M5	M5	20	19.7	8	16	10
RPB MG0400	G1/8	23.5	23.5	10	18	10
RPB MG0401	G1/4	28	28	14	22	10
RPB MG05M5	M5	20	19.7	8	16	12.8
RPB MG0500	G1/8	23.5	23.5	10	18	12.8
RPB MG0501	G1/4	28	28	14	22	12.8
RPB MG0502	G3/8	34	34	19	27.5	12.8
RPB MG0503	G1/2	38	38	24	30	12.8
RPB MG06M5	M5	20	19.7	8	16	12.8
RPB MG0600	G1/8	23.5	23.5	10	18	12.8
RPB MG0601	G1/4	28	28	14	22	12.8
RPB MG0602	G3/8	34	34	19	27.5	12.8
RPB MG0603	G1/2	38	38	24	30	12.8
RPB MG0800	G1/8	23.5	24.6	10	18	13.8
RPB MG0801	G1/4	28	26.8	14	22	13.8
RPB MG0802	G3/8	34	28.8	19	27.5	13.8
RPB MG0803	G1/2	38	30.5	24	30	13.8
RPB MG1000	G1/8	23.5	28.5	10	18	16.8
RPB MG1001	G1/4	28	31	14	22	16.8
RPB MG1002	G3/8	34	31	19	27.5	16.8
RPB MG1003	G1/2	38	34	24	30	16.8
RPB MG1201	G1/4	28	32	14	22	19.8
RPB MG1202	G3/8	34	34	19	27.5	19.8
RPB MG1203	G1/2	38	36	24	30	19.8
RPB MG1602	G3/8	34	34.8	19	27.5	23.8
RPB MG1603	G1/2	38	36.6	24	30	23.8