


SELBSTSICHERNDE STECKVERBINDER - CONEX

90°-Winkelstück mit langem
konischem Außengewinde - RPC LR

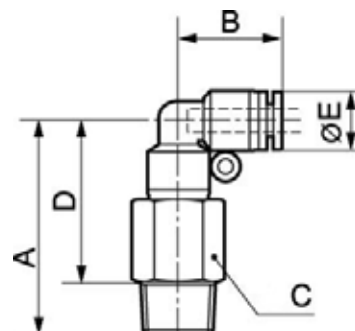

Pression min. d'utilisation - EU

0 / 10 bar

Min/Max Temperatur

0 / 60 °C

Art. Nr	AG	Abm. A (mm)	Abm. B (mm)	Abm. C (mm)	Abm. D (mm)	Abm. E (mm)
RPC LR0400	R1/8	35.5	17.5	10	28	10
RPC LR0401	R1/4	37	17.5	14	28	10
RPC LR0500	R1/8	40.5	20.5	12	33	12.8
RPC LR0501	R1/4	43.5	20.5	14	34.5	12.8
RPC LR0502	R3/8	46	20.5	17	35	12.8
RPC LR0503	R1/2	48.5	20.5	21	35.5	12.8
RPC LR0600	R1/8	40.5	20.5	12	33	12.8
RPC LR0601	R1/4	43.5	20.5	14	34.5	12.8
RPC LR0602	R3/8	46	20.5	17	35	12.8
RPC LR0603	R1/2	48.5	20.5	21	35.5	12.8
RPC LR0800	R1/8	44	22.5	14	36.5	13.8
RPC LR0801	R1/4	45.5	22.5	14	36.5	13.8
RPC LR0802	R3/8	48	22.5	17	37	13.8
RPC LR0803	R1/2	50.5	22.5	21	37.5	13.8
RPC LR1000	R1/8	51.2	26.3	17	43.7	16.8
RPC LR1001	R1/4	52.7	26.3	17	43.7	16.8
RPC LR1002	R3/8	54.7	26.3	17	43.7	16.8
RPC LR1003	R1/2	57.2	26.3	21	44.2	16.8
RPC LR1201	R1/4	55.5	27.8	19	46.5	19.8
RPC LR1202	R3/8	58	27.8	19	47	19.8
RPC LR1203	R1/2	60	27.8	21	47	19.8
RPC LR1402	R3/8	60.5	29.8	22	49.5	22.7
RPC LR1403	R1/2	62.5	29.8	22	49.5	22.7
RPC LR1602	R3/8	62	30.8	24	51	23.8
RPC LR1603	R1/2	64	30.8	24	51	23.8

Gewinde Teflon vorbeschichtet