


SELBSTSICHERNDE STECKVERBINDER - CONEX

Gerade Einschraubverbindung mit
zylindrischem Innengewinde - RPD
FG

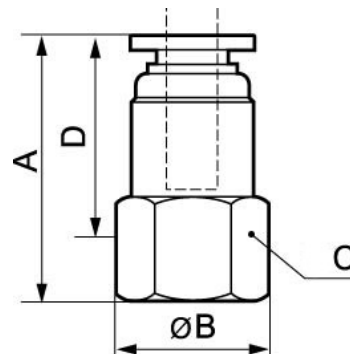

Pression min. d'utilisation - EU

0 / 10 bar

Min/Max Temperatur

0 / 60 °C

Art. Nr	IG	Abm. A (mm)	Abm. B (mm)	Abm. C (mm)	Abm. D (mm)
RPD FG04M5	M5	22	14	12	17
RPD FG0400	G1/8	24	16.5	14	14
RPD FG0401	G1/4	26.5	20	17	19
RPD FG05M5	M5	23.5	16.5	14	18.5
RPD FG0500	G1/8	27	16.5	14	20
RPD FG0501	G1/4	26	20	17	18.5
RPD FG0502	G3/8	28.5	22	19	20.5
RPD FG0503	G1/2	31	28	24	21
RPD FG06M5	M5	23.5	16.5	14	18.5
RPD FG0600	G1/8	27	16.5	14	20
RPD FG0601	G1/4	26	20	17	18.5
RPD FG0602	G3/8	28.5	22	19	20.5
RPD FG0603	G1/2	31	28	24	21
RPD FG0800	G1/8	28	20	17	21
RPD FG0801	G1/4	28	20	17	20.5
RPD FG0802	G3/8	28.5	22	19	20.5
RPD FG0803	G1/2	31	28	24	21
RPD FG1000	G1/8	29.5	22	19	22.5
RPD FG1001	G1/4	29.5	22	19	22
RPD FG1002	G3/8	32	24.5	21	24
RPD FG1003	G1/2	32	28	24	22
RPD FG1201	G1/4	31.5	24.5	21	24
RPD FG1202	G3/8	33	24.5	21	25
RPD FG1203	G1/2	33	28	24	23
RPD FG1402	G3/8	31.3	28	24	23.3
RPD FG1403	G1/2	32	28	24	22
RPD FG1602	G3/8	34	28	24	26
RPD FG1603	G1/2	35	28	24	25