


SELBSTSICHERNDE STECKVERBINDER - CONEX

135° - Winkelstück mit zylindrischem
Außengewinde - RPQ MG

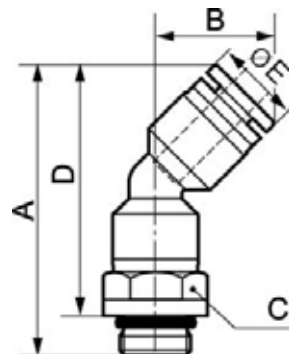

Pression min. d'utilisation - EU

0 / 10 bar

Min/Max Temperatur

0 / 60 °C

Art. Nr	AG	Abm. A (mm)	Abm. B (mm)	Abm. C (mm)	Abm. D (mm)	Abm. E (mm)
RPQ MG04M5	M5	39	14.5	10	35	10
RPQ MG0400	G1/8	38	14.5	12	33.5	10
RPQ MG0401	G1/4	39	14.5	14	33	10
RPQ MG05M5	M5	43	16.5	12	39	12.8
RPQ MG0500	G1/8	41.5	16.5	12	35.5	12.8
RPQ MG0501	G1/4	42.5	16.5	14	36.5	12.8
RPQ MG0502	G3/8	44	16.5	17	37.5	12.8
RPQ MG0503	G1/2	44	16.5	21	36	12.8
RPQ MG06M5	M5	42.5	16.5	12	38.5	12.8
RPQ MG0600	G1/8	42	16.5	12	35.5	12.8
RPQ MG0601	G1/4	43	16.5	14	37	12.8
RPQ MG0602	G3/8	44	16.5	17	37.5	12.8
RPQ MG0603	G1/2	45	16.5	21	37	12.8
RPQ MG0800	G1/8	46	19	14	40.5	13.8
RPQ MG0801	G1/4	46	19	14	40	13.8
RPQ MG0802	G3/8	47	19	17	40	13.8
RPQ MG0803	G1/2	48.5	19	21	40.5	13.8
RPQ MG1000	G1/8	51	22	17	45	16.8
RPQ MG1001	G1/4	51	22	17	45	16.8
RPQ MG1002	G3/8	51	22	17	44.5	16.8
RPQ MG1003	G1/2	52	22	21	44	16.8
RPQ MG1201	G1/4	55	23	19	49	19.8
RPQ MG1202	G3/8	55	23	19	48.5	19.8
RPQ MG1203	G1/2	56	23	21	48	19.8