


SELBSTSICHERNDE STECKVERBINDER - CONEX

135°-Winkelstück mit konischem
Außengewinde - RPQ MR

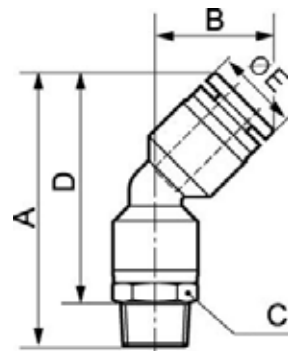

Pression min. d'utilisation - EU

0 / 10 bar

Min/Max Temperatur

0 / 60 °C

Art. Nr	AG	Abm. A (mm)	Abm. B (mm)	Abm. C (mm)	Abm. D (mm)	Abm. E (mm)
RPQ MR0400	R1/8	39.4	14.5	10	31.9	10
RPQ MR0401	R1/4	40.9	14.5	14	31.9	10
RPQ MR0500	R1/8	43	16.5	12	35.5	12.8
RPQ MR0501	R1/4	44.5	16.5	14	35.5	12.8
RPQ MR0502	R3/8	47	16.5	17	36	12.8
RPQ MR0503	R1/2	49.5	16.5	21	36.5	12.8
RPQ MR0600	R1/8	43	16.5	12	35.5	12.8
RPQ MR0601	R1/4	44.5	16.5	14	35.5	12.8
RPQ MR0602	R3/8	47	16.5	17	36	12.8
RPQ MR0603	R1/2	49.5	16.5	21	36.5	12.8
RPQ MR0800	R1/8	46	19	14	38.5	13.8
RPQ MR0801	R1/4	47.5	19	14	38.5	13.8
RPQ MR0802	R3/8	50	19	17	39	13.8
RPQ MR0803	R1/2	52.5	19	21	39.5	13.8
RPQ MR1000	R1/8	51.3	22	17	43.8	16.8
RPQ MR1001	R1/4	52.8	22	17	43.8	16.8
RPQ MR1002	R3/8	54.8	22	17	43.8	16.8
RPQ MR1003	R1/2	57.3	22	21	44.3	16.8
RPQ MR1201	R1/4	55.5	23	19	46.5	19.8
RPQ MR1202	R3/8	58	23	19	47	19.8
RPQ MR1203	R1/2	60	23	21	47	19.8

Gewinde Teflon vorbeschichtet