


## SCHLAUCHTÜLLE

Schlauchtülle mit konischem  
Außengewinde - JPC

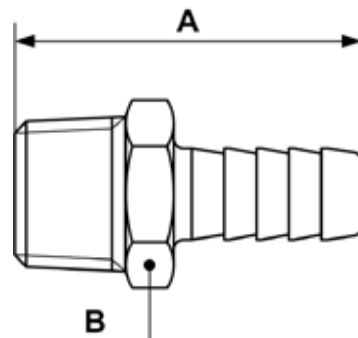

Pression min. d'utilisation - EU

0 / 15 bar

| Art. Nr  | AG   | Abm. A (mm) | Abm. B (mm) |
|----------|------|-------------|-------------|
| JPC 1806 | R1/8 | 32          | 12          |
| JPC 1807 | R1/8 | 32          | 12          |
| JPC 1808 | R1/8 | 32          | 12          |
| JPC 1406 | R1/4 | 36          | 14          |
| JPC 1407 | R1/4 | 36          | 14          |
| JPC 1408 | R1/4 | 36          | 14          |
| JPC 1409 | R1/4 | 36          | 14          |
| JPC 1410 | R1/4 | 36          | 14          |
| JPC 1413 | G1/4 | 33          | 12          |
| JPC 3809 | R3/8 | 36          | 17          |
| JPC 3810 | R3/8 | 36          | 17          |
| JPC 3813 | R3/8 | 36          | 17          |
| JPC 3816 | R3/8 | 36          | 18          |
| JPC 3819 | R3/8 | 36          | 21          |
| JPC 1210 | R1/2 | 39          | 22          |
| JPC 1213 | R1/2 | 39          | 22          |
| JPC 1217 | R1/2 | 39          | 22          |
| JPC 1219 | R1/2 | 39          | 22          |
| JPC 3415 | R3/4 | 43.5        | 27          |
| JPC 3419 | R3/4 | 39          | 27          |
| JPC 3424 | R3/4 | 41          | 27          |
| JPC 0124 | R1   | 53.5        | 34          |