


PPS SYSTEM VOLLALUMINIUM - DRUCKLUFTLEITUNGEN

PPS1 BFV - Gerade Anbohrschelle
mit montiertem Kugelhahn

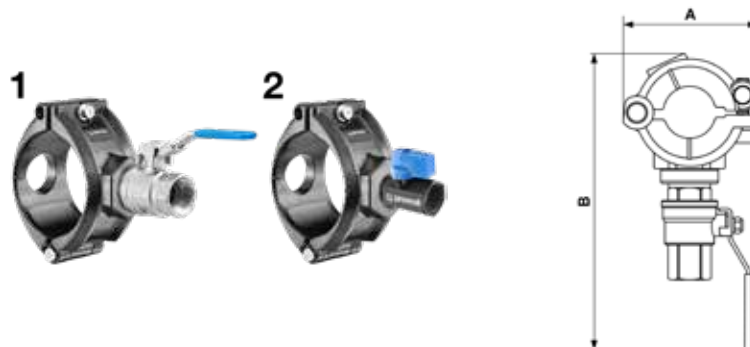

Max. Betriebsdruck (bar)

16

Min/Max Temperatur (°C)

-20 / 80

Material

Aluminium

Art. Nr	IG		Für Rohr mit Außen-Ø	Nettogewicht (Kg)	Abm. A (mm)	Abm. B (mm)
2. PPS1 BFV2512	G1/2	G1/2	25	0.26	65	145
2. PPS1 BFV3212	G1/2	G1/2	32	0.5	65	145
2. PPS1 BFV4012	G1/2	G1/2	40	0,737	94	170
1. PPS1 BFV4034	G1	G1	40	1.044	94	210
2. PPS1 BFV5012	G1/2	G1/2	50	0.675	94	170
1. PPS1 BFV5034	G1	G1	50	0.985	94	210
2. PPS1 BFV6312	G1/2	G1/2	63	1.21	137	210
1. PPS1 BFV6334	G1	G1	63	1,498	137	245
2. PPS1 BFV8012	G1/2	G1/2	80	1.1	137	210
1. PPS1 BFV8034	G1	G1	80	1.398	137	245
2. PPS1 BFV10012	G1/2	G1/2	100	1.24	159	225
1. PPS1 BFV10034	G1	G1	100	1,52	159	255