


PVR VERBINDER ZUM KLEBEN

PVR TER - Kunststoff-T-Stück
reduziert

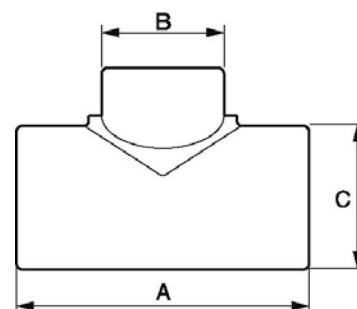

Max. Betriebsdruck (bar)

13

Min/Max Temperatur (°C)

-20 / 50

Material

PVC

Art. Nr	Für Rohr mit Außen-Ø	Nettogewicht (Kg)	Abm. A (mm)	Abm. B (mm)	Abm. C (mm)
PVR TER2520	25; 20	0,037	66	27.5	33.5
PVR TER3220	32; 20	0,0657	78	27.5	42
PVR TER3225	32; 25	0,063	78	33.5	42
PVR TER4020	40; 20	0,104	94	27.5	51
PVR TER4025	40; 25	0,106	94	33.5	51
PVR TER5020	50; 20	0,153	114	27.5	61
PVR TER5025	50; 25	0,16	114	33.5	61
PVR TER6320	63; 20	0,271	142	27.5	75
PVR TER6325	63; 25	0,272	142	33.5	75