


STANDARD-SCHNELLKUPPLUNGEN - ERC 07

Kupplung mit zylindrischem Außengewinde

Profil : EUROPEAN

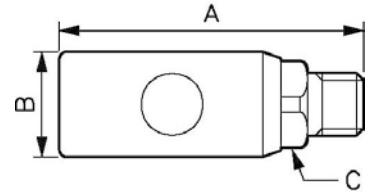

Min/max Betriebsdruck	Durchfluß bei 6 bar	Durchmesser	Min/Max Temperatur
0 / 12 bar	833 l/min	7.4 mm	-15 / 70 °C

Art. Nr	AG	Abm. A (mm)	Abm. B (mm)	Abm. C (mm)
ERC 071151	G1/4	79.5	28	23
ERC 071152	G3/8	79.5	28	23
ERC 071153	G1/2	81.5	28	23
ERC 071251	NPT1/4	79.5	28	23
ERC 071252	NPT3/8	79.5	28	23
ERC 071253	NPT1/2	81.5	28	23