


ACCESSOIRES DE RACCORDEMENT - COUDES - TÉS

Coude égal femelle cylindrique - A9

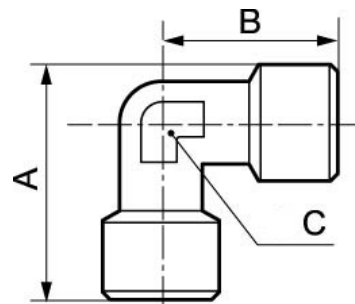

Pression d'utilisation min/max

0 / 15 bar

Référence	Taraudage	Cote A (mm)	Cote B (mm)	Cote C (mm)
A9 1818	G1/8	27.5	20.5	10
A9 1414	G1/4	34.5	26	13
A9 3838	G3/8	38.5	30	15
A9 1212	G1/2	47	36	20
A9 3434	G3/4	53	36.5	25
A9 0101	G1	64.5	45	30