


## RACCORDS À CANULE

Coude mâle 90° conique - RB5

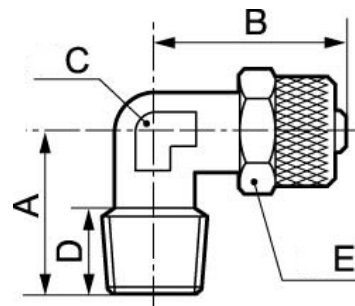

15

Température min/max

-20 / 80 °C

Référence	Filetage	Cote A (mm)	Cote B (mm)	Cote C (mm)	Cote D (mm)	Cote E (mm)
<b>RB5 614</b>	R1/4	20	22	9	10	12
<b>RB5 618</b>	R1/8	17	22	9	7	12
<b>RB5 814</b>	R1/4	20	22	12	10	14
<b>RB5 818</b>	R1/8	18	23	12	8	14
<b>RB5 838</b>	R3/8	21	21	9	12	16
<b>RB5 1014</b>	R1/4	20.5	25	12	10	16
<b>RB5 1038</b>	R3/8	22	23	11	12	14
<b>RB5 1238</b>	R3/8	24	31	17	12	19