


RACCORDS INSTANTANÉS POLYMÈRES

Banjo mâle conique orientable - RPB
MR

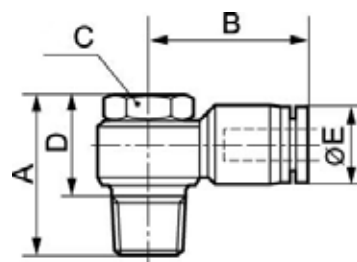

Pression d'utilisation min/max

0 / 10 bar

Température min/max

0 / 60 °C

Référence	Filetage	Cote A (mm)	Cote B (mm)	Cote C (mm)	Cote D (mm)	Cote E (mm)
RPB MR0400	R1/8	25	21.8	10	17.5	10
RPB MR0401	R1/4	29	24	14	20	10
RPB MR0500	R1/8	25	23	10	17.5	12.8
RPB MR0501	R1/4	29	25.5	14	20	12.8
RPB MR0502	R3/8	35	27.1	19	24	12.8
RPB MR0503	R1/2	40	30.1	24	27	12.8
RPB MR0600	R1/8	25	23	10	17.5	12.8
RPB MR0601	R1/4	29	25.5	14	20	12.8
RPB MR0602	R3/8	35	27.1	19	24	12.8
RPB MR0603	R1/2	40	30.1	24	27	12.8
RPB MR0800	R1/8	25	24.6	10	17.5	13.8
RPB MR0801	R1/4	29	26.8	14	20	13.8
RPB MR0802	R3/8	35	28.8	19	24	13.8
RPB MR0803	R1/2	40	30.5	24	27	13.8
RPB MR1000	R1/8	25	28.5	10	17.5	16.8
RPB MR1001	R1/4	29	31	14	20	16.8
RPB MR1002	R3/8	35	31	19	24	16.8
RPB MR1003	R1/2	40	34	24	27	16.8
RPB MR1201	R1/4	29	31.8	14	20	19.8
RPB MR1202	R3/8	35	34	19	24	19.8
RPB MR1203	R1/2	40	35.8	24	27	19.8
RPB MR1602	R3/8	35	34.8	19	24	23.8
RPB MR1603	R1/2	40	36.6	24	27	23.8

Filetage préteflonné