


RACCORDS INSTANTANÉS POLYMÈRES

Té égal - RPT ET

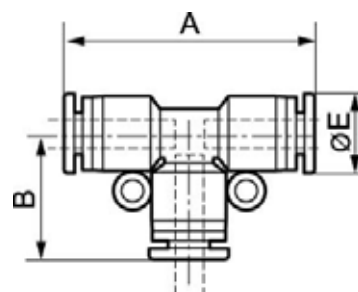

Pression d'utilisation min/max

0 / 10 bar

Température min/max

0 / 60 °C

Référence	Cote A (mm)	Cote B (mm)	Cote E (mm)
RPT ET0404	35	17.5	10
RPT ET0505	40	20	12.8
RPT ET0606	40	20	12.8
RPT ET0808	45.6	22.8	13.8
RPT ET1010	54	27	16.8
RPT ET1212	55.6	27.8	19.8
RPT ET1414	62	31	22.7
RPT ET1616	64	32	23.8