


## RACCORDS INSTANTANÉS POLYMÈRES

Y de piquage - RPY PT

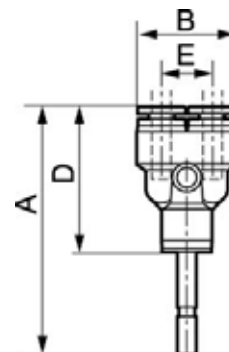

Pression d'utilisation min/max

0 / 10 bar

Température min/max

0 / 60 °C

Référence	Cote A (mm)	Cote B (mm)	Cote D (mm)	Cote E (mm)
RPY PT0404	48.5	20	31	10.5
RPY PT0505	53.5	25.6	33.5	13
RPY PT0606	55	25.6	33	13
RPY PT0808	55.3	27.6	33.5	14.5
RPY PT1010	70.8	33.6	45.5	18
RPY PT1212	73.3	39.6	48	20
RPY PT1414	75.8	45.4	49	23.3
RPY PT1616	79	47.6	51	24.5