



APPLIQUES MURALES MULTIPLES NUES

Applique multiple

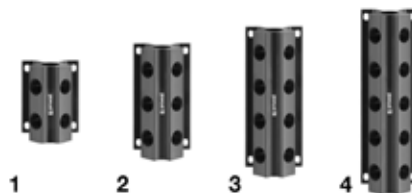

Pression max. d'utilisation (bar)

12

Température min/max (°C)

-20 / 80

Matière

Aluminium

Référence commerciale		Taraudage	Poids net (Kg)	Cote A (mm)	Cote B (mm)	Cote C (mm)	Cote D (mm)	Cote E (mm)
1. MF 104S4	4.00	G1/2; G3/4	0.37	78	100	63	80	6.5
2. MF 104S6	6.00	G1/2; G3/4	0.530	78	145	63	125	6.5
3. MF 104S8	8.00	G1/2; G3/4	0.68	78	190	63	170	6.5
4. MF 104S10	10.00	G1/2; G3/4	0.845	78	235	63	215	6.5