


PREVOST FILTRATION - SINGLE UNITS

Filter-regulator

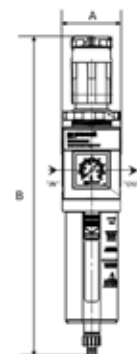

Max. operating pressure
10 bar

Filtration (µm)
25.00

Min. / Max temperature
5 / 50 °C

Part number	Female thread	Flow rate at 6 bar (l/min) (ΔP= 1.00 bar)		Net weight (Kg)
ATU M2585100	G1/8	700	0.5 / 8.5	0.563
ATU M2585101	G1/4	1000	0.5 / 8.5	0.463
ATU M2585102	G3/8	3000	0.5 / 8.5	0,9
ATU M2585103	G1/2	4500	0.5 / 8.5	0.9