


FITTINGS UNIONS - REDUCERS

Parallel male union - A1

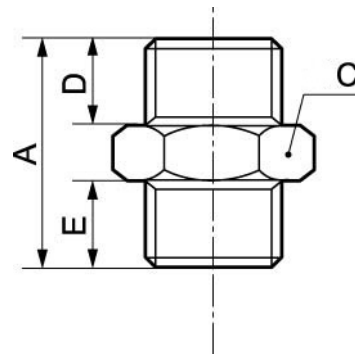

Min / Max operating pressure

0 / 15 bar
0.00 / 15.00 bar
0 / 15 bar
0.00 / 15.00 bar
0 / 15 bar
0.00 / 15.00 bar
0 / 15 bar

Part number	Male thread	Dim. A (mm)	Dim. C (mm)	Dim. D (mm)	Dim. E (mm)
A1 M5M5	M5	11.5	8	4	4
A1 M518	M5; G1/8	14.5	14	6	4
A1 1818	G1/8	17	14	6	6
A1 1814	G1/8; G1/4	19	17	8	6
A1 1838	G1/8; G3/8	20	20	9	6
A1 1414	G1/4	21	17	8	8
A1 1438	G1/4; G3/8	22	20	9	8
A1 1412	G1/2; G1/4	24	25	10	8
A1 14251	G1/4; NPT1/4	25	14	10	10
A1 3838	G3/8	24	20	9	9
A1 3812	G3/8; G1/2	25.5	25	10	9
A1 1212	G1/2	26.50	25.00	10.00	10.00
A1 3834	G3/8; G3/4	22	26	10.5	7.5
A1 3434	G3/4	28.5	30	11	11
A1 1201	G1/2; G1	27.00	33.00	11.00	11.00
A1 3412	G3/4; G1/2	27	30	10	11
A1 0101	G1	31.00	36.00	12.00	12.00
A1 3401	G3/4; G1	30	36	11	12
A1 3442	G3/4; G1 1/4	31	42	14	11