


QUICK COUPLINGS WITH INLINE OILER

Sealed LUB'AIR assembly with several profiles

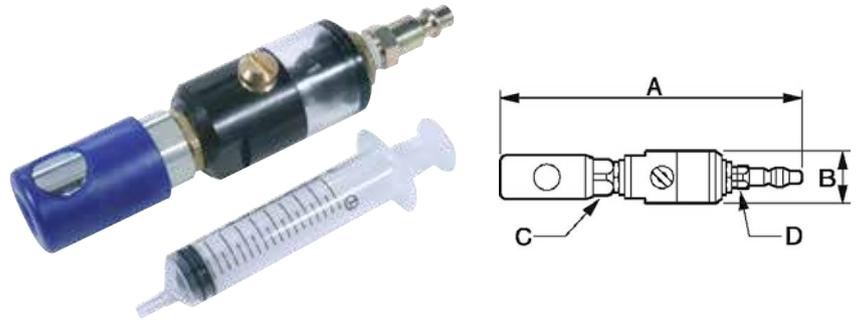

ID passage (mm)		Min. / Max temperature (°C)	Profile - EU
6 mm	ISO 6150B	-15 / 70	ISO 6150B
8 mm			

Part number	Net weight (Kg)	Dim. A (mm)	Dim. B (mm)
LUBAIR 6000	0,258	151	33
LUBAIR 8000	0,346	183	33
LUBAIR 14F	0,089	68	33