


CONEX PUSH FITTINGS

Parallel female 90° elbow - RPC FG

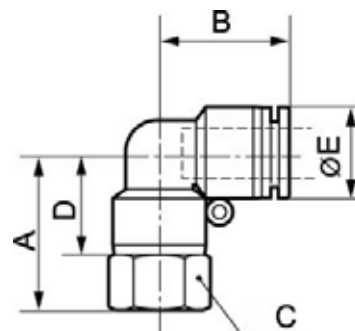

Min / Max operating pressure

0 / 10 bar

Min. / Max temperature

0 / 60 °C

Part number	Female thread	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)	Dim. D (mm)	Dim. E (mm)
RPC FG04M5	M5	20.5	17.5	12	15.5	10
RPC FG0400	G1/8	22.5	17.5	12	15.5	10
RPC FG0401	G1/4	23	17.5	17	15.5	10
RPC FG05M5	M5	23	20.5	12	18	12.8
RPC FG0500	G1/8	25	20.5	12	18	12.8
RPC FG0501	G1/4	25.5	20.5	17	18	12.8
RPC FG0502	G3/8	26	20.5	19	18	12.8
RPC FG0503	G1/2	28	20.5	24	18	12.8
RPC FG0600	G1/8	25	20.5	12	18	12.8
RPC FG06M5	M5	23	20.5	12	18	12.8
RPC FG0601	G1/4	25.5	20.5	17	18	12.8
RPC FG0602	G3/8	26	20.5	19	18	12.8
RPC FG0603	G1/2	28	20.5	24	18	12.8
RPC FG0800	G1/8	26.7	22.5	14	19.7	13.8
RPC FG0801	G1/4	27.2	22.5	17	19.7	13.8
RPC FG0802	G3/8	27.7	22.5	19	19.7	13.8
RPC FG0803	G1/2	29.7	22.5	24	19.7	13.8
RPC FG1000	G1/8	30.2	26.3	19	23.2	16.8
RPC FG1001	G1/4	30.7	26.3	19	23.2	16.8
RPC FG1002	G3/8	31.2	26.3	19	23.2	16.8
RPC FG1003	G1/2	33.2	26.3	24	23.2	16.8
RPC FG1201	G1/4	31.5	27.8	19	24	19.8
RPC FG1202	G3/8	32	27.8	21	24	19.8
RPC FG1203	G1/2	34	27.8	24	24	19.8
RPC FG1402	G3/8	33.5	29.8	22	25.5	22.7
RPC FG1403	G1/2	35.5	29.8	24	25.5	22.7
RPC FG1602	G3/8	35	30.8	24	27	23.8
RPC FG1603	G1/2	37	30.8	24	27	23.8