


CONEX PUSH FITTINGS

Tapered female 90° elbow - RPC FR

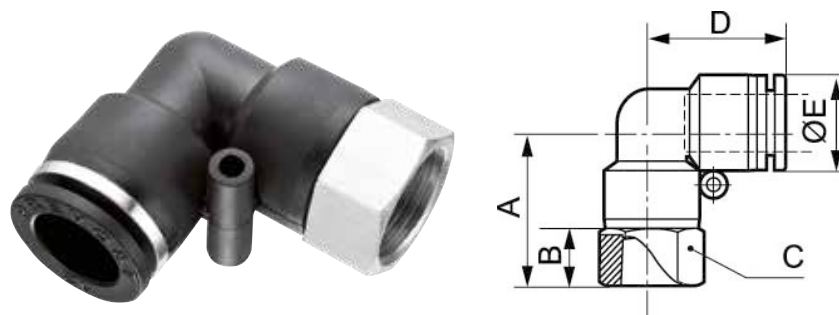

Min / Max operating pressure

0 / 10 bar

0 / 10 bar

Min. / Max temperature

0 / 60 °C

Part number	Female thread	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)	Dim. D (mm)	Dim. E (mm)
RPC FR5320	NPT1/8	24,5	11	1/2	17,5	10
RPC FR3120	NPT1/8	27	11	1/2	20,5	12,8
RPC FR3121	NPT1/4	30	14	11/16	20,5	12,8
RPC FR4120	NPT1/8	27	11	1/2	20,5	12,8
RPC FR4121	NPT1/4	30	14	11/16	20,5	12,8
RPC FR5120	NPT1/8	28,7	11	9/16	22,5	13,8
RPC FR5121	NPT1/4	29,7	14	11/16	22,5	13,8
RPC FR5122	NPT3/8	32,7	15	7/8	22,5	13,8
RPC FR3821	NPT1/4	33,2	14	11/16	26,3	16,8
RPC FR3822	NPT3/8	34,2	15	7/8	26,3	16,8
RPC FR2123	NPT1/2	41,2	18	1	28,4	20,5