


CONEX PUSH FITTINGS

Long parallel male 90° elbow - RPC
LG

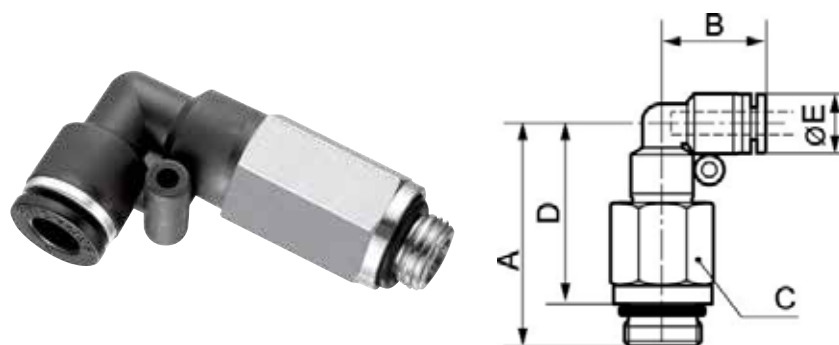

Min / Max operating pressure

0 / 10 bar

Min. / Max temperature

0 / 60 °C

Part number	Male thread	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)	Dim. D (mm)	Dim. E (mm)
RPC LG04M5	M5	35.5	17.5	10	31.5	10
RPC LG0400	G1/8	34.5	17.5	14	29	10
RPC LG0401	G1/4	35	17.5	17	29	10
RPC LG05M5	M5	40.5	20.5	12	36.5	12.8
RPC LG0500	G1/8	40	20.5	14	34.5	12.8
RPC LG0501	G1/4	42	20.5	17	36	12.8
RPC LG0502	G3/8	43.5	20.5	21	37	12.8
RPC LG0503	G1/2	44.5	20.5	24	36.5	12.8
RPC LG06M5	M5	40.5	20.5	12	36.5	12.8
RPC LG0600	G1/8	40	20.5	14	34.5	12.8
RPC LG0601	G1/4	42	20.5	17	36	12.8
RPC LG0602	G3/8	43.5	20.5	21	37	12.8
RPC LG0603	G1/2	44.5	20.5	24	36.5	12.8
RPC LG0800	G1/8	44	22.5	14	38.5	13.8
RPC LG0801	G1/4	44	22.5	14	38	13.8
RPC LG0802	G3/8	45.5	22.5	17	39	13.8
RPC LG0803	G1/2	46.5	22.5	24	38.5	13.8
RPC LG1000	G1/8	51.7	26.3	17	46.2	16.8
RPC LG1001	G1/4	52.2	26.3	17	46.2	16.8
RPC LG1002	G3/8	52.2	26.3	21	45.7	16.8
RPC LG1003	G1/2	53.2	26.3	24	45.2	16.8
RPC LG1201	G1/4	55	27.8	19	49	19.8
RPC LG1202	G3/8	54.5	27.8	21	48	19.8
RPC LG1203	G1/2	56	27.8	24	48	19.8
RPC LG1402	G3/8	57	29.8	24	50.5	22.7
RPC LG1403	G1/2	58.5	29.8	24	50.5	22.7
RPC LG1602	G3/8	58.5	30.8	24	52	23.8
RPC LG1603	G1/2	60	30.8	24	52	23.8