


CONEX PUSH FITTINGS

Long tapered male 90° elbow - RPC
LR

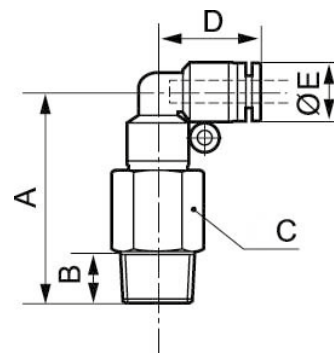

Min / Max operating pressure

0 / 10 bar

Min. / Max temperature

0 / 60 °C

Part number	Male thread	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)	Dim. D (mm)	Dim. E (mm)
RPC LR1820	NPT1/8					
RPC LR2121	NPT1/4					
RPC LR2122	NPT3/8					
RPC LR2123	NPT1/2					
RPC LR3120	NPT1/8	41,5	8	1/2	20,5	12,8
RPC LR3121	NPT1/4	45,5	11	9/16	20,5	12,8
RPC LR3122	NPT3/8	47	12	11/16	20,5	12,8
RPC LR3821	NPT1/4	54,7	11	11/16	26,3	16,8
RPC LR3822	NPT3/8	55,7	12	11/16	26,3	16,8
RPC LR3823	NPT1/2	59,7	15	7/8	26,3	16,8
RPC LR4120	NPT1/8	41,5	8	1/2	20,5	12,8
RPC LR4121	NPT1/4	45,5	11	9/16	20,5	12,8
RPC LR4122	NPT3/8	47	12	11/16	20,5	12,8
RPC LR5120	NPT1/8	44,2	8	9/16	22,5	13,8
RPC LR5121	NPT1/4	47,2	11	9/16	22,5	13,8
RPC LR5122	NPT3/8	48,7	12	11/16	22,5	13,8
RPC LR5320	NPT1/8	36	8	7/16	17,5	10