


CONEX PUSH FITTINGS

Tapered female straight adaptor -
RPD FR

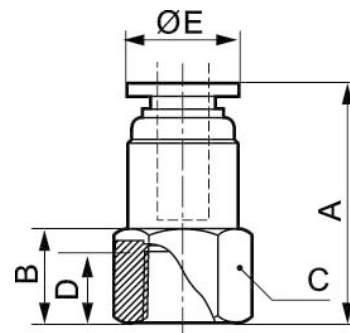

Min / Max operating pressure

0 / 10 bar

Min. / Max temperature

0 / 60 °C

Part number	Female thread	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)	Dim. D (mm)	Dim. E (mm)
RPD FR1820	NPT1/8					
RPD FR5320	NPT1/8	26,5	11	1/2	9	10
RPD FR5321	NPT1/4	29	14	11/16	12	10
RPD FR3120	NPT1/8	26,5	11	1/2	9	12,8
RPD FR3121	NPT1/4	29	14	11/16	12	12,8
RPD FR4120	NPT1/8	28	11	9/16	9	12,8
RPD FR4121	NPT1/4	31	14	11/16	12	12,8
RPD FR5120	NPT1/8	30	11	11/16	9	13,8
RPD FR5121	NPT1/4	32	14	11/16	12	13,8
RPD FR5122	NPT3/8	32,5	15	7/8	13	13,8
RPD FR3821	NPT1/4	32,6	14	7/8	12	16,8
RPD FR3822	NPT3/8	33,6	15	7/8	13	16,8
RPD FR2121	NPT1/4					
RPD FR2122	NPT3/8					