


CONEX PUSH FITTINGS

Tapered male straight adaptor - RPD
MR

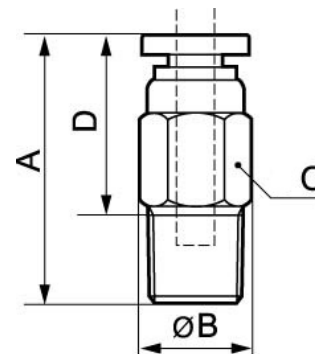

Min / Max operating pressure

0 / 10 bar

Min. / Max temperature

0 / 60 °C

Part number	Male thread	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)	Dim. D (mm)
RPD MR0400	R1/8	21	11.5	10	13.5
RPD MR0401	R1/4	20	16	14	11
RPD MR0500	R1/8	22	14	12	14.5
RPD MR0501	R1/4	21	16	14	12
RPD MR0502	R3/8	23	19.5	17	12
RPD MR0503	R1/2	25.5	24	21	12.5
RPD MR0600	R1/8	22	14	12	14.5
RPD MR0601	R1/4	21	16	14	12
RPD MR0602	R3/8	23	19.5	17	12
RPD MR0603	R1/2	25.5	24	21	12.5
RPD MR0800	R1/8	27	16	14	19.5
RPD MR0801	R1/4	24	16	14	15
RPD MR0802	R3/8	24.5	19.5	17	13.5
RPD MR0803	R1/2	26	24	21	13
RPD MR1000	R1/8	28	19.5	17	20.5
RPD MR1001	R1/4	29	19.5	17	20
RPD MR1002	R3/8	27	19.5	17	16
RPD MR1003	R1/2	26	24	21	13
RPD MR1201	R1/4	33	22	19	24
RPD MR1202	R3/8	29.5	22	19	18.5
RPD MR1203	R1/2	27.5	24	21	8
RPD MR1402	R3/8	33.1	25	22	22.1
RPD MR1403	R1/2	31.2	25	22	18.2
RPD MR1602	R3/8	35	27.5	24	24
RPD MR1603	R1/2	33	27.5	24	20
RPD MR1820	NPT1/8				
RPD MR2121	NPT1/4				
RPD MR2122	NPT3/8				
RPD MR2123	NPT1/2				

Teflon-coated thread