


METAL SAFETY QUICK COUPLINGS - CSM 06



Parallel female thread coupler

Profile : ISO 6150C

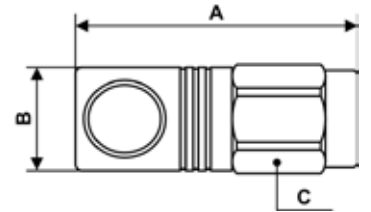

Min / Max operating pressure 0 / 16 bar	Flow rate at 6 bar 833 l/min	ID passage 6 mm	Min. / Max temperature -15 / 70 °C
---	--	---------------------------	--

Part number	Female thread	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)
CSM 061101	G1/4	52.5	22	20
CSM 061102	G3/8	60.5	22	21
CSM 061103	G1/2	63.5	22	25