


## METAL SAFETY QUICK COUPLINGS - CSM 08



Tapered male thread twin coupler

Profile : ISO 6150C

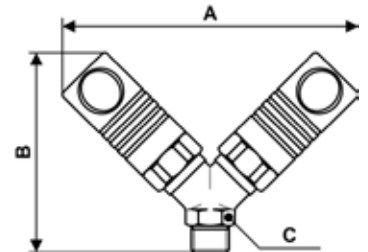

<b>Min / Max operating pressure</b> 2 / 16 bar	<b>Flow rate at 6 bar</b> 2120 l/min	<b>ID passage</b> 8 mm	<b>Min. / Max temperature</b> -15 / 70 °C
---	---	---------------------------	--

Part number	Male thread	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)
CSM 088152	R3/8	132	88	20
CSM 088153	R1/2	140	98	25
CSM 088154	R3/4	150	130	32