


METAL SAFETY QUICK COUPLINGS - CSM 08



Tapered female thread swivel coupler

Profile : ISO 6150C

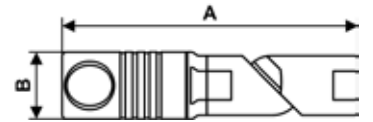

Min / Max operating pressure 2 / 16 bar	Flow rate at 6 bar 2120 l/min	ID passage 8 mm	Min. / Max temperature -15 / 70 °C
---	---	---------------------------	--

Part number	Female thread	Dim. A (mm)	Dim. B (mm)
CSM 081102SW	G3/8	120	27