


## METAL SAFETY QUICK COUPLINGS - CSM 11

Parallel male thread coupling

Profile : ISO 6150C

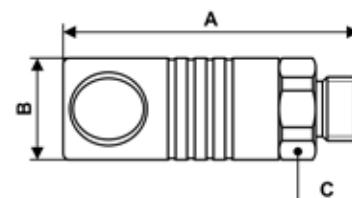

|    |                                           |                                 |
|----|-------------------------------------------|---------------------------------|
| 16 | <b>Flow rate at 6 bar</b><br>4120 (l/min) | <b>ID passage (mm)</b><br>11 mm |
|----|-------------------------------------------|---------------------------------|

| Part number | Male thread | Dim. A (mm) | Dim. B (mm) | Dim. C (mm) |
|-------------|-------------|-------------|-------------|-------------|
| CSM 111152  | G3/8        | 94          | 33          | 30          |
| CSM 111153  | G1/2        | 96          | 33          | 30          |
| CSM 111154  | G3/4        | 98          | 33          | 30          |