


ENCLOSED HOSE REELS FOR COMPRESSED AIR / STEEL

DSF Series - Small - Polyurethane hose

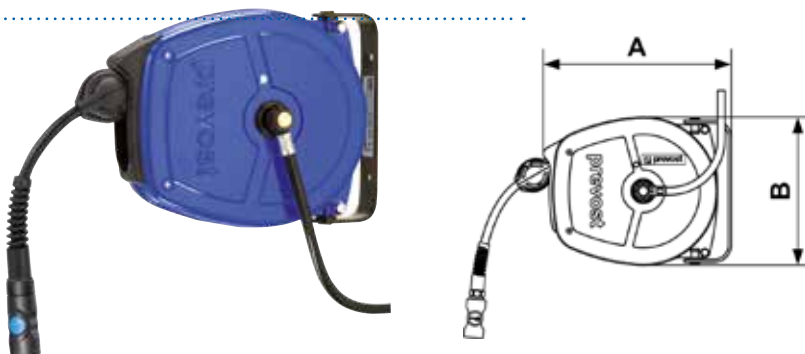

Max. operating pressure (bar)

12

Min. / Max temperature

-15 / 40 °C

Part number	Length (m)	Ø int/ext (mm)	Profile	Flow rate	For pipe ID	ID passage (mm)	Dim. A (mm)	Dim. B (mm)
DSF 0805IS	5	8 / 11	ISO 6150B	650 (l/min)	8	6 mm	275	218
DSF 1003IS	3	10 / 14	ISO 6150B	833 (l/min)	10	6 mm	275	218
DSF 0805ES	5	8 / 11	EUROPEAN	650 (l/min)	8	7.4 mm	275	218
DSF 1003ES	3	10 / 14	EUROPEAN	1100 (l/min)	10	7.4 mm	275	218
DSF 0805BS	5	8 / 11	BRITISH	650 (l/min)	8	6 mm	275	218
DSF 1003BS	3	10 / 14	BRITISH	750 (l/min)	10	6 mm	275	218
DSF 0805US	5	8 / 11	TRUFLATE	650 (l/min)	8	6 mm	275	218
DSF 1003US	3	10 / 14	TRUFLATE	833 (l/min)	10	6 mm	275	218
DSF 0805CS	5	8 / 11	ISO 6150C	650 (l/min)	8	6 mm	275	218
DSF 1003CS	3	10 / 14	ISO 6150C	833 (l/min)	10	6 mm	275	218

180° swiveling bracket