


## QUICK COUPLINGS FOR WATER SYSTEMS

### Female thread valved coupler

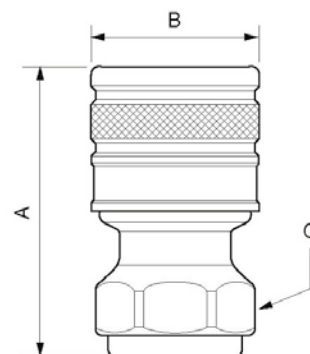

| Min / Max operating pressure | Flow rate at | ID passage (mm) | Min. / Max temperature |
|------------------------------|--------------|-----------------|------------------------|
| 0 / 10 bar                   | 24 (l/min)   | 9 mm            | -15 / 60 °C            |

| Part number | Female thread | Dim. A (mm) | Dim. B (mm) | Dim. C (mm) |
|-------------|---------------|-------------|-------------|-------------|
| ELS 091103  | G1/2          | 61          | 35          | 30          |
| ELS 091104  | G3/4          | 57          | 35          | 30          |
| ELS 091105  | G1            | 62.5        | 35          | 38          |