


RACCORDI AD INNESTO RAPIDO IN OTTONE NICHELATO

T intermedio - RMT ET

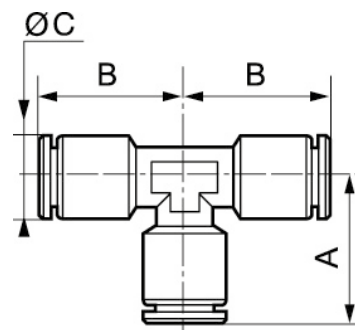

Pressione di utilizzo min/max

0 / 15 bar

Temperatura min/max

-20 / 80 °C

Codice	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)
RMT ET0404	21	21	9.8
RMT ET0606	24	24	11.6
RMT ET0808	26	26	13.5
RMT ET1010	30.5	30.5	15.6
RMT ET1212	33.5	33.5	17.8
RMT ET1414	37	37	19.8