


RACCORDI AD INNESTO RAPIDO IN OTTONE NICHELATO

Dritto intermedio - RMU ET

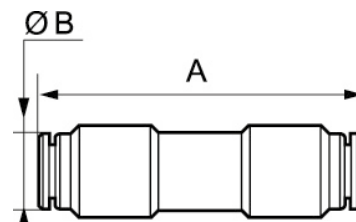

Pressione di utilizzo min/max

0 / 15 bar

Temperatura min/max

-20 / 80 °C

Codice	Dim. A (mm)	Dim. B (mm)
RMU ET0404	32.5	9.8
RMU ET0606	40	11.6
RMU ET0808	41	13.5
RMU ET1010	42	15.6
RMU ET1212	50	17.8
RMU ET1414	55.5	19.8