


RACCORDI AD INNESTO RAPIDO IN OTTONE NICHELATO

Dritto intermedio passalamiera - RMU TT

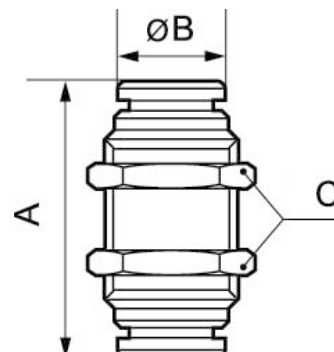

Pressione di utilizzo min/max

0 / 15 bar

Temperatura min/max

-20 / 80 °C

Codice	Dim. A (mm)	Dim. B (mm)	Dim. C (mm)
RMU TT0404	33	9.8	16
RMU TT0606	40	11.6	17
RMU TT0808	41	13.5	20
RMU TT1010	47	15.6	24
RMU TT1212	52	18	27