


## RACCORDI ISTANTANEI IN POLIMERO

T intermedio - RPT ET

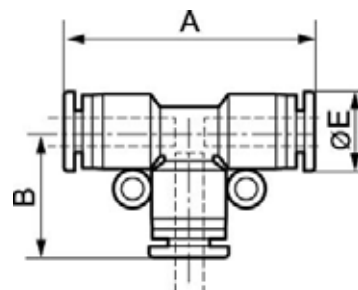

Pressione di utilizzo min/max

0 / 10 bar

Temperatura min/max

0 / 60 °C

Codice	Dim. A (mm)	Dim. B (mm)	Dim. E (mm)
RPT ET0404	35	17.5	10
RPT ET0505	40	20	12.8
RPT ET0606	40	20	12.8
RPT ET0808	45.6	22.8	13.8
RPT ET1010	54	27	16.8
RPT ET1212	55.6	27.8	19.8
RPT ET1414	62	31	22.7
RPT ET1616	64	32	23.8