


VALVOLE A SFERA

Valvola ottone maschio / femmina PN 40

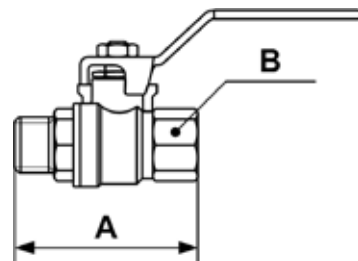

40

Temperatura min/max

-10 / 80 °C

Codice	Filettatura	Maschiatura	Dim. A (mm)	Dim. B (mm)
RSIMF 13	G1/4	G1/4	39	20
RSIMF 17	G3/8	G3/8	39	20
RSIMF 21	G1/2	G1/2	50	25
RSIMF 27	G3/4	G3/4	54	31
RSIMF 34	G1	G1	67	38