


RACCORDI ISTANTANEI IN POLIMERO

Y pari - RPY ET

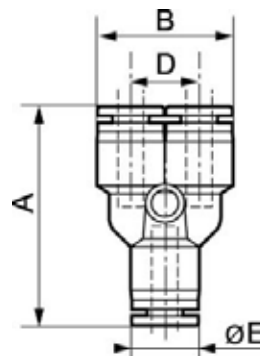

Pressione di utilizzo min/max

0 / 10 bar

Temperatura min/max

0 / 60 °C

Codice	Dim. A (mm)	Dim. B (mm)	Dim. D (mm)	Dim. E (mm)
RPY ET0404	34	20	10.5	10
RPY ET0505	37	25.6	13	12.8
RPY ET0606	37	25.6	13	12.8
RPY ET0808	37.6	27.6	14.5	13.8
RPY ET1010	50.6	33.6	18	16.8
RPY ET1212	53.1	39.6	20	19.8
RPY ET1414	54.6	45.4	23.3	22.7
RPY ET1616	56.6	49	24.5	24.5