


RACCORDI ISTANTANEI IN POLIMERO

Y riduzione - RPY IT

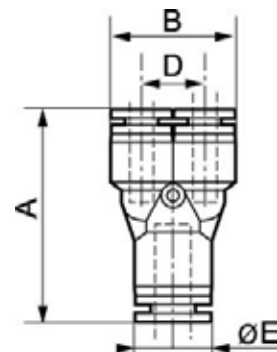

Pressione di utilizzo min/max

0 / 10 bar

Temperatura min/max

0 / 60 °C

Codice	Dim. A (mm)	Dim. B (mm)	Dim. D (mm)	Dim. E (mm)
RPY IT0604	35.5	20	10.5	12.8
RPY IT0806	42	25.6	13	13.8
RPY IT1008	49.6	27.6	14.5	16.8
RPY IT1210	53	33.6	18	19.8
RPY IT1612	56.6	39.6	24.5	24.5