


FITTING ADAPTORS - REDUCERS

Brass Bushing

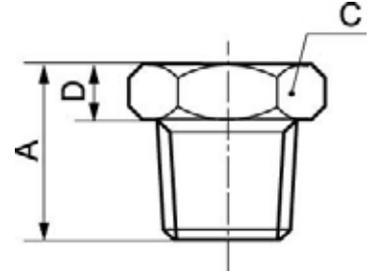

Min/max operating pressure

0 / 218 psi

Part number	Male thread	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)	Dim. D (inch)
A4 1418	R1/4	G1/8	0,011	0.63		0.55	0.2
A4 3814	R3/8	G1/4	0,015	0.67		0.67	0.22
A4 1214	R1/2	G1/4	0.041	0.79		0.87	0.24
A4 1238	R1/2	G3/8	0,024	0.79		0.87	0.24
A4 3412	R3/4	G1/2	0,044	0.91		1.06	0.26
A4 0134	R1	G3/4	0.075	0.98		1.34	0.28
A4 4234	R1 1/4	G3/4	0,135	0.79		1.65	0.24
A4 4901	R1 1/2	G1	0,244	1.32		2.13	0.39
A4 4942	R1 1/2	G1 1/4	0,081	0.79		1.97	0.24
A4 251200	NPT1/4	NPT1/8	0	0,75		0,55	0,24
A4 252200	NPT3/8	NPT1/8	0	0,77		0,75	0,26
A4 252201	NPT3/8	NPT1/4	0	0,91		0,75	0,39
A4 253200	NPT1/2	NPT1/8	0.01				
A4 253201	NPT1/2	NPT1/4	0	0,96		0,87	0,3
A4 253202	NPT1/2	NPT3/8	0,04	0,57		0,47	0,24
A4 254201	NPT3/4	NPT1/4	0.01	0,76	0,95		
A4 254202	NPT3/4	NPT3/8	0.01				
A4 254203	NPT3/4	NPT1/2	0.01				
A4 255203	NPT1	NPT1/2	0.01				
A4 255204	NPT1	NPT3/4	0.01				