


## REGULAR METAL QUICK COUPLING - 1/4» INDUSTRIAL PROFILE



Female coupler

Profile : ISO 6150B

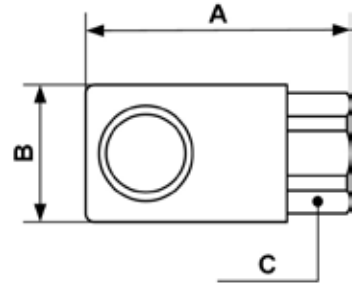

<b>Min/max operating pressure</b> 0 / 174 psi	<b>Flow rate at 87 psi</b> 26 CFM	<b>ID passage</b> 1/4"	<b>Temperature min/max</b> 5 / 158 °F
--	--------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
IRM 061201	NPT1/4	0,133	2.07	1.02	0.91
IRM 061203	NPT1/2	0,155	2.38	0.91	0.91