


METAL SAFETY QUICK COUPLINGS - 1/4» ISO 6150 C PROFILE



Female coupler

Profile : ISO 6150C

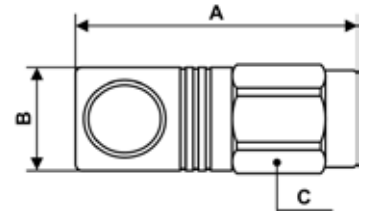

Min/max operating pressure 0 / 232 psi	Flow rate at 87 psi 29 CFM	ID passage 1/4"	Temperature min/max 5 / 158 °F
--	--------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
CSM 061201	NPT1/4	0,081	2.01	0.87	0.79
CSM 061202	NPT3/8	0,092	2.28	0.87	0.83
CSM 061203	NPT1/2	0,114	2.44	0.87	0.98