


## METAL SAFETY QUICK COUPLINGS - 1/4» ISO 6150 C PROFILE



### Male coupler

Profile : ISO 6150C

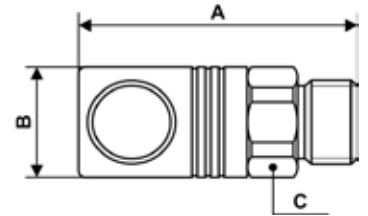

<b>Min/max operating pressure</b>	<b>Flow rate at 87 psi</b>	<b>ID passage</b>	<b>Temperature min/max</b>
0 / 232 psi	29 CFM	1/4"	5 / 158 °F

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
<b>CSM 061251</b>	NPT1/4	0,081	2.32	0.87	0.79
<b>CSM 061252</b>	NPT3/8	0,089	2.32	0.87	0.79
<b>CSM 061253</b>	NPT1/2	0,118	2.48	0.87	0.91