


## METAL SAFETY QUICK COUPLINGS - 1/4» ISO 6150 C PROFILE



Female thread swivel coupler

Profile : ISO 6150C

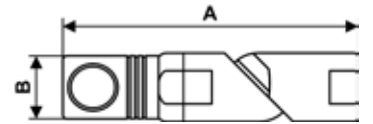

<b>Min/max operating pressure</b>	<b>Flow rate at 87 psi</b>	<b>ID passage</b>	<b>Temperature min/max</b>
0 / 232 psi	29 CFM	1/4"	5 / 158 °F

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)
<b>CSM 061202SW</b>	NPT3/8	0,122	4.06	0.94