


METAL SAFETY QUICK COUPLINGS - 3/8» ISO 6150 C PROFILE



Male coupler

Profile : ISO 6150C

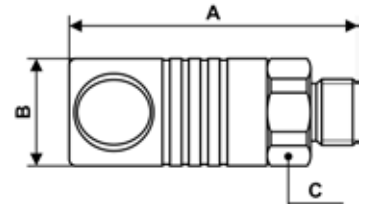

Min/max operating pressure 29 / 232 psi	Flow rate at 87 psi 75 CFM	ID passage 3/8"	Temperature min/max 5 / 158 °F
---	--------------------------------------	---------------------------	--

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
CSM 081251	NPT1/4	0,164	2.91	1.06	0.98
CSM 081252	NPT3/8	0,169	2.91	1.06	0.98
CSM 081253	NPT1/2	0,183	3.07	1.06	0.98