


## METAL SAFETY QUICK COUPLINGS - 3/8» ISO 6150 C PROFILE



Female thread swivel coupler

Profile : ISO 6150C

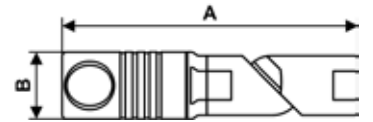

<b>Min/max operating pressure</b> 29 / 232 psi	<b>Flow rate at 87 psi</b> 75 CFM	<b>ID passage</b> 3/8"	<b>Temperature min/max</b> 5 / 158 °F
---------------------------------------------------	--------------------------------------	---------------------------	------------------------------------------

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)
CSM 081202SW	NPT3/8	0,2	4.72	1.06