


METAL SAFETY QUICK COUPLING - 1/2" ISO 6150 C PROFILE



Male coupler

Profile : ISO 6150C

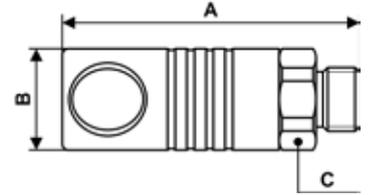

Min/max operating pressure 29 / 232 psi	Flow rate at 87 psi 145 CFM	ID passage 1/2"	Temperature min/max 5 / 158 °F
---	---------------------------------------	---------------------------	--

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
CSM 111252	NPT3/8	0,308	3.74	1.3	1.18
CSM 111253	NPT1/2	0,321	3.9	1.3	1.18
CSM 111254	NPT3/4	0,34	4.06	1.3	1.18