


STAINLESS STEEL QUICK COUPLING - 1/4» INDUSTRIAL PROFILE



Female coupler - Stainless Steel

Profile : ISO 6150B

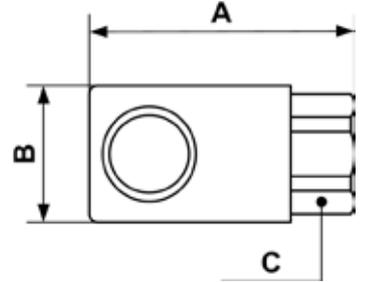

| | | | |
|--|--------------------------------------|---------------------------|--|
| Min/max operating pressure 0 / 174 psi | Flow rate at 87 psi 28 CFM | ID passage 1/4" | Temperature min/max 5 / 158 °F |
|--|--------------------------------------|---------------------------|--|

| Part number | Female thread | Net weight (Kg) | Dim. A (inch) | Dim. B (inch) | Dim. C (inch) |
|--------------|---------------|-----------------|---------------|---------------|---------------|
| PROXI 061101 | G1/4 | 0,081 | 2.13 | 1.1 | 0.91 |
| PROXI 061102 | G3/8 | 0,093 | 2.44 | 1.1 | 0.91 |
| PROXI 061103 | G1/2 | 0,089 | 2.56 | 1.1 | 0.98 |