


REGULAR QUICK - 3/8» COUPLING HIGH FLOW PROFILE



Female coupler

Profile : EUROPEAN

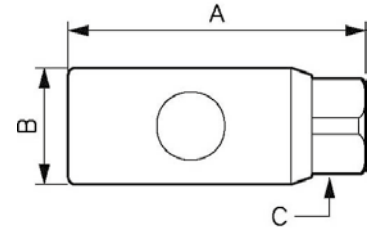

Min/max operating pressure	Flow rate at 87 psi	ID passage	Temperature min/max
0 / 174 psi	29 CFM	3/8"	5 / 158 °F

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ERC 071201	NPT1/4	0,105	2.81	1.1	0.91
ERC 071202	NPT3/8	0,125	3.13	1.1	0.91
ERC 071203	NPT1/2	0,13	3.25	1.1	0.98