


REGULAR QUICK - 3/8» COUPLING HIGH FLOW PROFILE



Male coupler

Profile : EUROPEAN

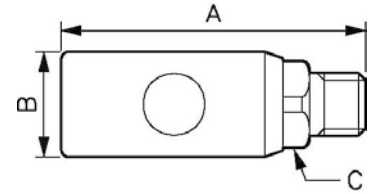

Min/max operating pressure 0 / 174 psi	Flow rate at 87 psi 29 CFM	ID passage 3/8"	Temperature min/max 5 / 158 °F
--	--------------------------------------	---------------------------	--

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ERC 071251	NPT1/4	0,11	3.13	1.1	0.91
ERC 071252	NPT3/8	0,116	3.13	1.1	0.91
ERC 071253	NPT1/2	0,122	3.21	1.1	0.91