


REGULAR QUICK - 3/8» COUPLING HIGH FLOW PROFILE



Female thread swivel coupler

Profile : EUROPEAN

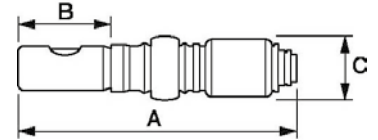

| | | | |
|-----------------------------------|----------------------------|-------------------|----------------------------|
| Min/max operating pressure | Flow rate at 87 psi | ID passage | Temperature min/max |
| 0 / 174 psi | 29 CFM | 3/8" | 5 / 158 °F |

| Part number | Female thread | Net weight (Kg) | Dim. A (inch) | Dim. B (inch) | Dim. C (inch) |
|--------------|---------------|-----------------|---------------|---------------|---------------|
| ERC 071201FA | NPT1/4 | 0,239 | 6.9 | 2.3 | 1.57 |
| ERC 071202FA | NPT3/8 | 0,242 | 6.9 | 2.3 | 1.57 |