


REGULAR QUICK COUPLING - 1/4» INDUSTRIAL PROFILE



Female coupler

Profile : ISO 6150B

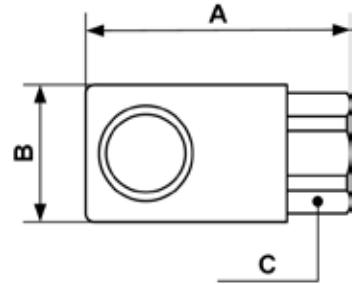

Min/max operating pressure 0 / 174 psi	Flow rate at 87 psi 28 CFM	ID passage 1/4"	Temperature min/max 5 / 158 °F
--	--------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
IRC 061201	NPT1/4	0,073	2.13	1.1	0.91
IRC 061202	NPT3/8	0,093	2.44	1.1	0.91
IRC 061203	NPT1/2	0,097	2.56	1.1	0.91